


Pin Assignment

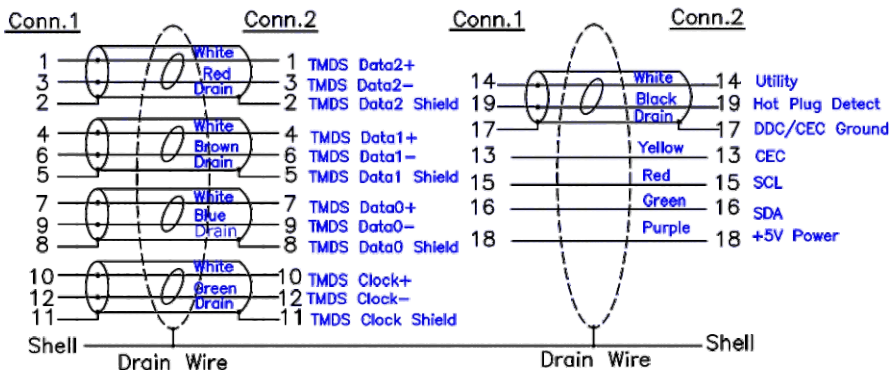

Electrical Test:

- 100% Test (Open, short, miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi-pot: 100V DC/10ms

Table:

P/N	Length	Resistance
	915±20mm	2 ohm
	1830±30mm	2 ohm
	3050±40mm	2 ohm
	4575±60mm	2 ohm

⑤	Copper Foil	0.11	M
④	Outside Molding: 45P PVC, Black	20	g
③	Inside Molding: PE	3	g
②	HDMI 19P Male, Pin Gold Planted, Shell Gold Flash, Insulation: Black	2	pcs
①	High Speed HDMI Cable with Ethernet Cable: UL20276 [28AWG(7/0.127TC)*1PR+DW(1/0.32CCS)+AL/Mylar]*5P+(1/0.32CCS)*3C+28AWG(7/0.127TC)*1C+Filler+AL/MY+DW(7/0.127TC)+Braid(16/5/0.12Al/mg)+Jacket OD:7.30±0.2mm Color: Black,Cable Printing: HIGH SPEED HDMI* CABLE WITH ETHERNET E342987 AWM STYLE 20276 80°C 30V VW-1---c AWM II A/B 80°C 30V FT1	L	M
NO.	DESCRIPTION	Q'TY	UNIT

REV.	TOLERANCE		DESCRIPTION	DATE
	INCHES	M/M	PCCABLES.COM INC	
	.X	.015 .30	TITLE: High Speed HDMI Cable with Ethernet, 28AWG, Gold Flash	
	.XX	.010 .10		
	.XXX	.005 .05		
DRAWN BY	Albert		CUSTOMER :	
CHECK BY			CUSTOMER NO.:	
APPD BY			SCALE	NONE
			UNIT	MM
			DATE	2013.12.31
	DRAWING NO.:			REV. A
				1/1