


ROHS

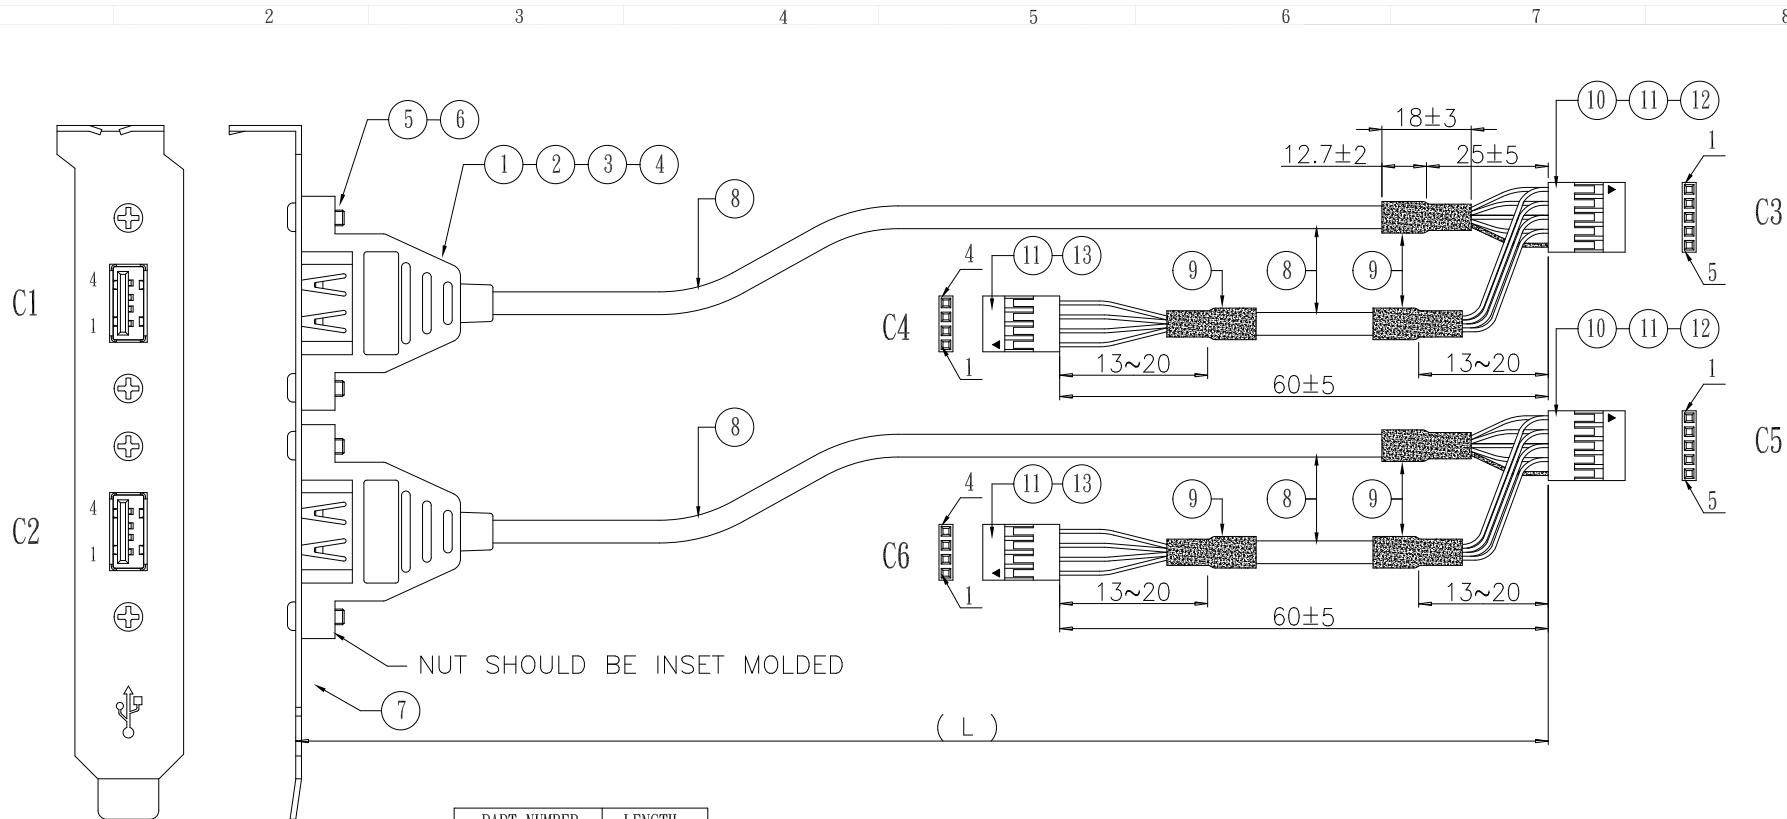

PART NUMBER	LENGTH
70500	406±10
70499	660±15
NA	810±15

Notes:

- Each Cable Must Tested Open, Short and Misswires.
- Electronic:
  - Conductor Resistance: 3 Ohm Max.
  - Insulation Resistance: 10M Ohm Min. At DC: 300V
- USB 1和USB 2之鐵殼短路或開路均為良品.

13	WB11F1F0425401	HOUSING 4P PITCH:2.54 COLOR:BLACK 低毒	2 PCS
12	WBL1AW11000301	HEAT SHRINK TUBE OD:1.0 L:30mm 低毒	2 PCS
11	WB41F1F2251442	TERMINAL GOLD FLASH	18 PCS
10	WB11F1F0525401	HOUSING 5P PITCH:2.54 COLOR:BLACK 低毒	2 PCS
9	WBL1AW14080172	HEAT SHRINK TUBE OD:5.0 L:17mm 低毒	6 PCS
8	/	UL2725 28**1P+24**2C AEB OD:4.7 WHITE(930)	2 Pcs
7	WB45E111C015C6	一般不加強型鐵片 USB雙孔 曲尾 鍍鎳 無折角	1 PC
6	WB44AK2F3602C1	螺母 M3.0 L:2.0mm 鍍鎳	4 PCS
5	WB44AK2M2610C1	十字型螺絲 M3.0 L:10mm 全牙螺絲 鍍鎳	4 PCS
4	WB51AQ5A000ZZ1	LD PE 7144 透明	4 g
3	WB51AQ1D562930	PVC 56P COLOR:WHITE(930) 低毒	10 g
2	WBL1AW11000081	HEAT SHRINK TUBE OD:1.0 L:8mm 低毒	2 PCS
1	WB02D141190004	USB A TYPE 4P FEMALE PIN GOLD FLASH 白膠心 SOLDER TYPE 低毒	2 PCS
Item	Part No.	Description	Q'TY

PIN ASSIGNMENT			
C1		C3	
1	紅	1	紅
2	白	2	白
3	綠	3	綠
4	黑	4	黑
SHELL	地線+編織	5	
C2		C5	
1	紅	1	紅
2	白	2	白
3	綠	3	綠
4	黑	4	黑
SHELL	地線+編織	5	

PCCABLES.COM INC

UNIT (mm)

.0 ±0.30  
.00 ±0.15  
.000 ±0.10  
ANGLE. ±1°

DIM. CLASS

■ CRITICAL  
□ MAJOR  
( ) REF.

USB 2port AF bracket to housing 4P+5P

PART NO. 70499

3RD. ANGLE'S



DRAWING NO.

DRAW KENT

CHECK LUCK

APPROVE JAMES

SCALE

SHEET

1/1

REV. A