


ELECTRICAL TEST:

1. 100% OPEN SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 3 OHM (MAX)
3. INSULATION RESISTANCE: 10M OHM (MIN)

CONSUMER ITEM	LENGTH(mm)
70500	406±10
70499	660±15

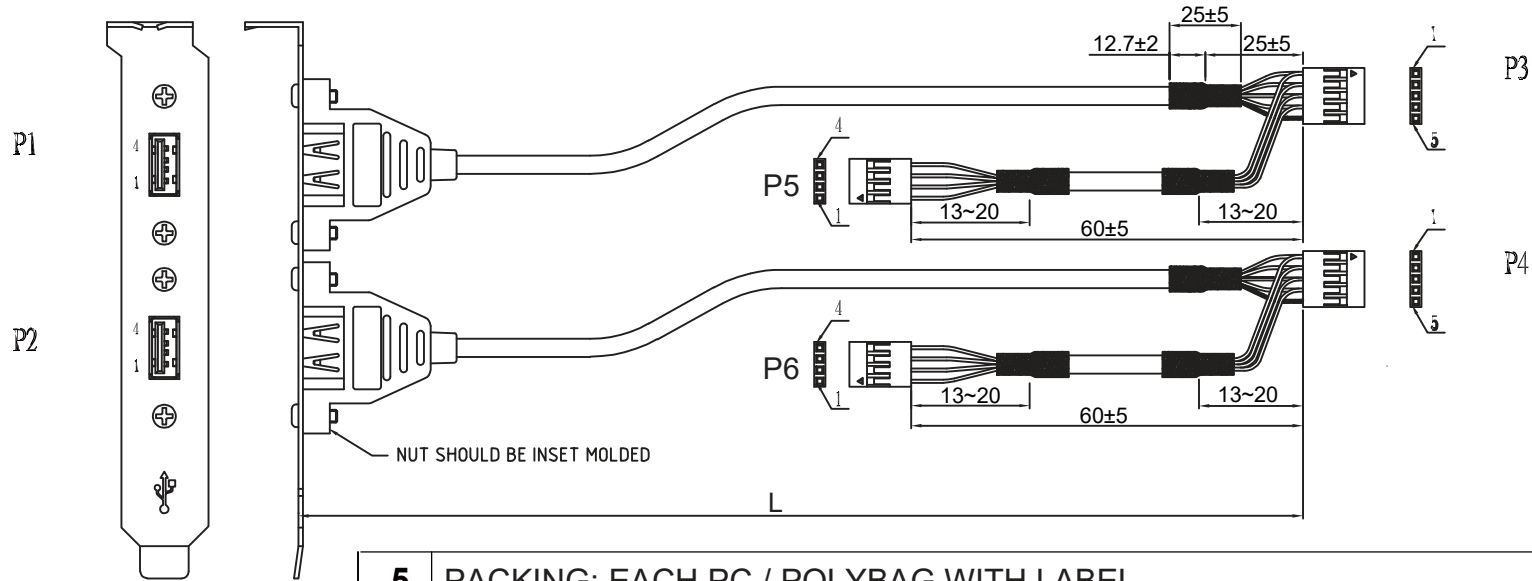

5	PACKING: EACH PC / POLYBAG WITH LABEL
4	HOOD: MOLDED TYPE PVC 45P, COLOR: WHITE
3	TERMINAL: FOR DUPONT HOUSING OR EQUIVALENT
2	P1 & P2: USB A SERIES FEMALE, SOLDER TYPE, FLASH GOLD PIN CONTACT P3 & P4: 2.54 PITCH 1*5 PIN DUPONT HSG OR EQUIVALENT, FLASH GOLD PIN CONTACT P5 & P6: 2.54 PITCH 1*4 PIN DUPONT HSG OR EQUIVALENT, FLASH GOLD PIN CONTACT
1	UL-2725 28AWG*1PAIR +24AWG*2C +AL-FOIL/MYLAR+DRAIN WIRE+BRAID (65%) PVC JACKET, OD:4.7MM COLOR:WHITE
NO	DESRIPTIO N

	P1	P3	P2	P4	P3	P5	P4	P6
VCC	1	1	RED	1	1	RED	1	1
-DATA	2	2	WHITE	2	2	WHITE	2	2
+DATA	3	3	GREEN	3	3	GREEN	3	3
GROUND	4	4	BLACK	4	4	BLACK	4	4
SHELL	BRAID	5	SHELL	BRAID	5			

				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
				MODEL NO.	USB 2port AF with bracket to Housing 4P+5P	△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.		△	2020/07/06		A2
		HENRY	L.H.R	FINISHING		△	2020/06/18		A1
				MATERIAL		SYM	DATE		REVISION